

FLEX SERIES

PART NUM: SA-FC-1ML

LOADER & UNLOADER


Single Magazine Loader

The loader modules are used for the automatic loading of PCB's in SMD lines. Pick and Place, screen printers, reflow ovens and test systems can be interfaced with it.

Imagery for illustration purposes only. Please consult your local Seica Automation distributor for more information.



Layout Module

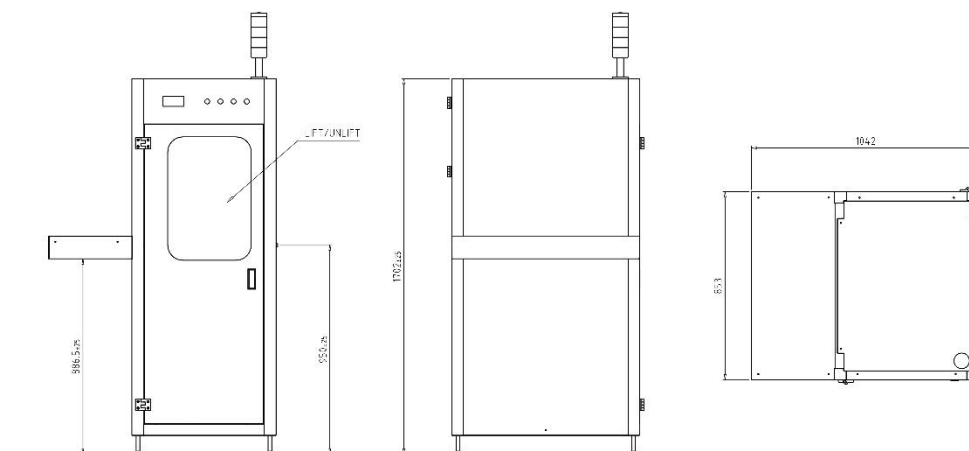

FLEX SERIES GENERAL FEATURES

TRANSPORT	
Height:	950 mm +/- 25 mm
Component clearance:	Top 50 mm (80 mm on request) Bottom 30 mm (80 mm on request)
PCB edge space:	Min. 3 mm
Transfer direction:	Left to right
Operating side:	Front of the machine
Fixed Rail:	Front of the machine
Interface:	SMEMA standard extended SMEMA Optional Fuji, Panasonic, Sanyo, Siemens, SMPI, Special
SMEMA cable length:	3 m

PANEL DIMENSION	
Length:	Min. 80 mm – Max 510 mm
Width:	Min. 85 mm – Max 390 mm
Optional width:	Up to 460 mm on request
Thickness:	From 0.8 mm to 4.0 mm
PCB max weight:	2 Kg
Max rack dimension:	535 x 460 x 570 mm (LxWxH)

VARIOUS:

- CE safety compliant
- PLC microprocessor driven system
- Mechanical keyboard or LCD display
- Automatic Width Adjust as option
- Single piece aluminium rails, proprietary design

POWER SUPPLY:

230V 1Ph+N+G 50Hz

CURRENT:

2 Ampere

AIR SUPPLY:

0,6 Mpa

WEIGHT:

70 Kg

DIMENSION LxWxH:

600x781x1.172 mm

COLOR:

RAL 7035

FRAME:

Aluminium profiles

All modules have ESD safe design and CE mark, each module has independent control system. Technical specification may change without any advice, please contact our representative office.



www.seica-automation.it

sales@seica-automation.com
info@seica-automation.com
+39 0362 15 72 717

Seica Automation s.r.l
Via Sardegna, 4 20841
Carate Brianza (MB) ITALY
P.iva / C.F. 11044290010