

FLEX SERIES

PART NUM: SA-FC-BBD

LOADER & UNLOADER

Bare Board Destacker ON FLY Loading setup

The bare board destacker modules are used for the automatic loading of stacked bare boards for an automatic line like screen printers or bare boards testers.

BBD allows simple manual adjust of conveyor.


Programmable display with PCC counter.

Awa Automatic width adjust as option.



Imagery for illustration purposes only. Please consult your local Seica Automation distributor for more information.

Layout Module

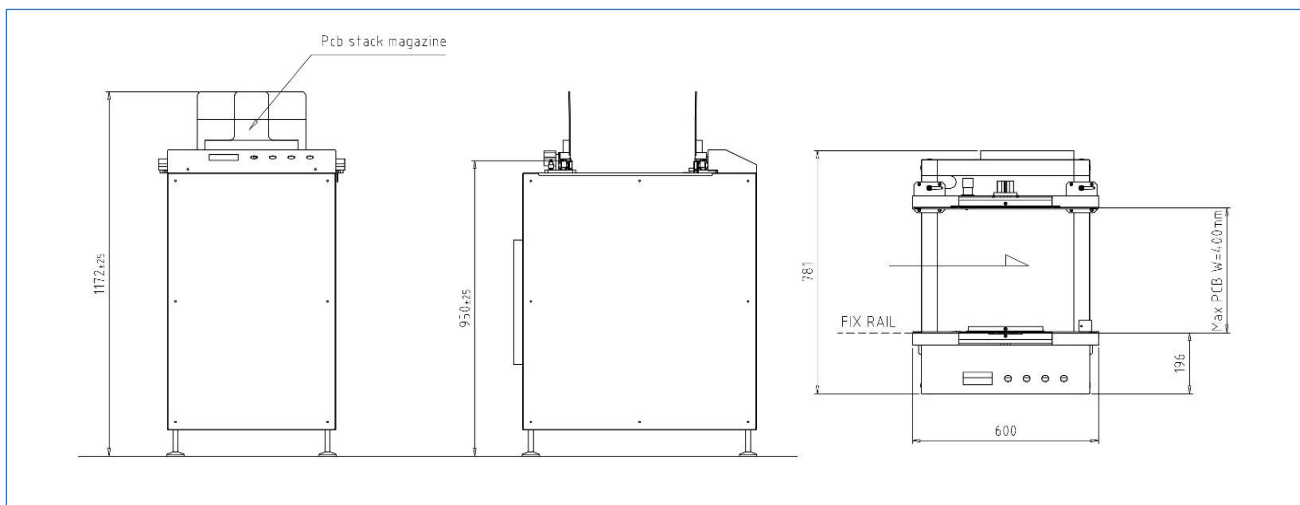

FLEX SERIES GENERAL FEATURES

TRANSPORT	
Height:	950 mm +/- 25 mm
Component clearance :	Top 50 mm (80 mm on request) Bottom 30 mm (80 mm on request)
PCB edge space:	Min. 3 mm
Transfer direction:	Left to right
Operating side:	Front of the machine
Fixed Rail:	Front of the machine
Interface:	SMEMA standard extended SMEMA Optional Fuji, Panasonic, Sanyo, Siemens, SMPI, Special
SMEMA cable length:	3 m

PANEL DIMENSION	
Length:	Min. 80 mm – Max 510 mm
Width:	Min. 85 mm – Max 390 mm
Optional width:	Up to 460 mm on request
Thickness:	From 0.8 mm to 2.5 mm
PCB max weight:	2 Kg
Max stack height:	200 mm

VARIOUS:

- CE safety compliant
- PLC microprocessor driven system
- Mechanical keyboard or LCD display with keyboard operation
- Automatic Width Adjust as option
- Single piece aluminium rails, proprietary design

POWER SUPPLY:

230V 1Ph+N+G 50Hz

CURRENT:

2 Ampere

AIR SUPPLY:

0,6 Mpa

WEIGHT:

70 Kg

DIMENSION LxWxH:

600x781x1.172 mm

COLOR:

RAL 7035

FRAME:

Aluminium profiles

All modules have ESD safe design and CE mark, each module has independent control system. Technical specification may change without any advice, please contact our representative office.

