

FLEX SERIES

PARTNUM:SA-FC-BBL-VSC

LOADER& UNLOADER

Bare Board Loader
Vacuum Suction Cup

The bare board loader is used for the automatic loading of stacked bare boards for an automatic line or screen printers or bare boards testers.


BBD VSC allows separation of very big and heavy boards and can be used also for paper separation.

Front Load.

Imagery for illustration purposes only. Please consult your local Seica Automation distributor for more information.



Layout Module

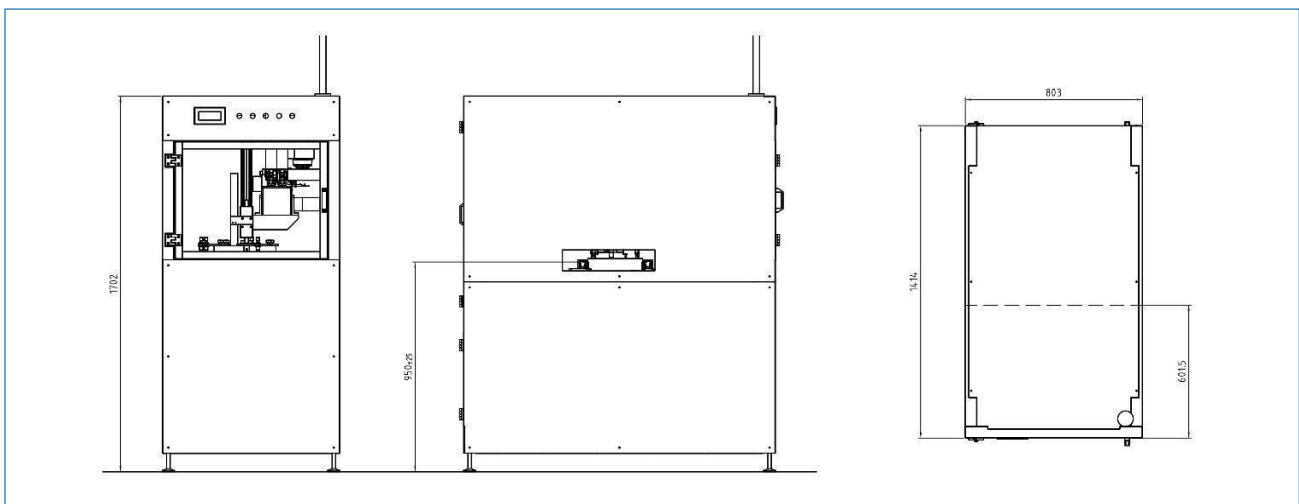

FLEX SERIES GENERAL FEATURES

TRANSPORT	
Height:	950 mm +/- 25 mm
Component clearance :	Top 50 mm (80 mm on request) Bottom 30 mm (80 mm on request)
PCB edge space:	Min. 3 mm
Transfer direction:	Left to right
Operating side:	Front of the machine
Fixed Rail:	Front of the machine
Interface:	SMEMA standard extended SMEMA Optional Fuji, Panasonic, Sanyo, Siemens, SMPI, Special
SMEMA cable length:	3 m
PCB max weight:	1 kg

PANEL DIMENSION	
Length:	Min. 80 mm – Max 510 mm
Width:	Min. 85 mm – Max 390 mm
Optional width:	Up to 460 mm on request
Thickness:	From 0.8 mm to 4.0 mm
Max stack height:	200 mm

VARIOUS:

- CE safety compliant
- PLC microprocessor driven system
- Mechanical keyboard or LCD display with keyboard operation
- Automatic Width Adjust as option
- Single piece aluminium rails, proprietary design

POWER SUPPLY:

230V 1Ph+N+G 50Hz

CURRENT:

2 Ampere

AIR SUPPLY:

0,6 Mpa

WEIGHT:

120 Kg

DIMENSION LxWxH:

803 x 1.414 x 1.702 mm

COLOR:

RAL 7035

FRAME:

Aluminium profiles

All modules have ESD safe design and CE mark, each module has independent control system. Technical specification may change without any advice, please contact our representative office.



www.seica-automation.it

sales@seica-automation.com

info@seica-automation.com

+39 0362 1572 717

Seica Automation s.r.l

Via Sardegna, 4 20841

Carate Brianza (MB) ITALY

P.iva / C.F. 11044290010