

FLEX SERIES


PART NUM: SA-FC-BRDG

TRAFFIC CONVEYOR - FLIP TURN INVERTER


Gate Conveyor Manual Bridge

Mainly applies to connect longer SMT lines.
Structure using 2 section conveyor, lifting manual mode.
Operator can lift up angle of 90° degrees to facilitate the passage of materials, operators and personnel vehicles.
Both section (Fix& Lift Up) can be custom length.

Imagery for illustration purposes only. Please consult your local Seica Automation distributor for more information.

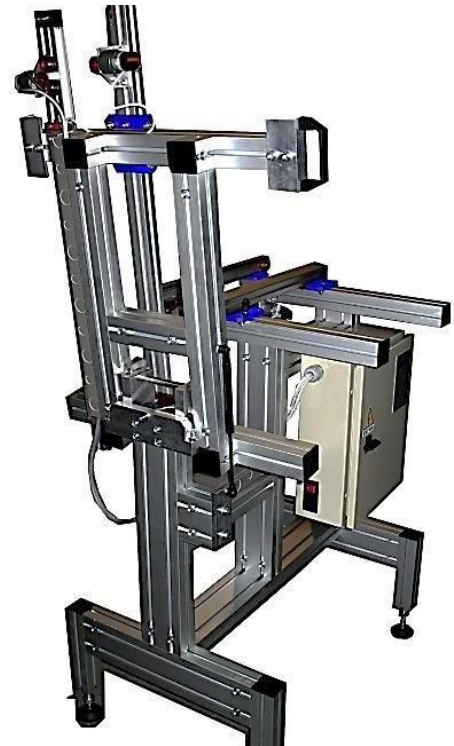

Layout Module

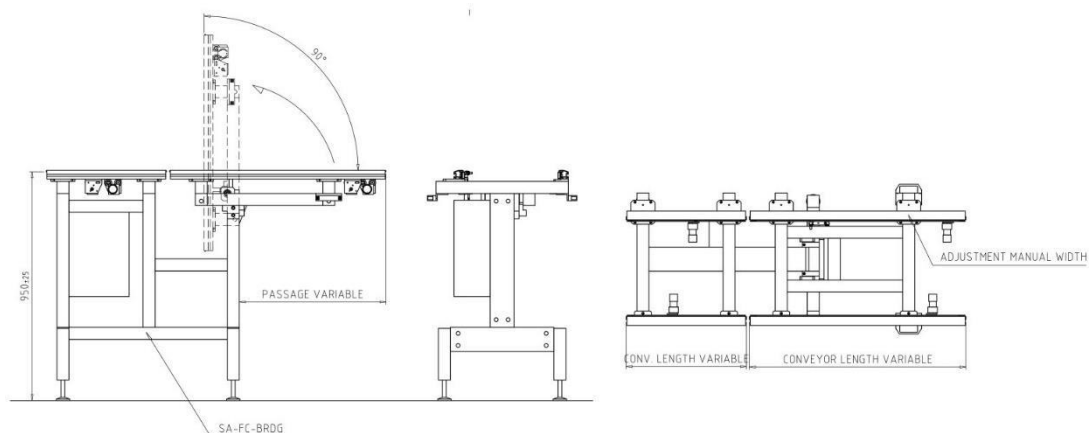

FLEX SERIES GENERAL FEATURES

TRANSPORT	
Height:	950 mm +/- 25 mm
Component clearance:	Top 50 mm (80 mm on request) Bottom 30 mm (80 mm on request)
PCB edge space:	Min. 3 mm
Transfer direction:	Left to right
Operating side:	Front of the machine
Fixed Rail:	Front of the machine
Interface:	SMEMA standard extended SMEMA Optional Fuji, Panasonic, Sanyo, Siemens, SMPI, Special
SMEMA cable length:	3 m

PANEL DIMENSION	
Length:	Min. 80 mm – Max 510 mm
Width:	Min. 85 mm – Max 390 mm
Optional width:	Up to 460 mm on request
Thickness:	From 0.8 mm to 4.0 mm
PCB max weight:	2 Kg

VARIOUS:

- CE safety compliant
- PLC microprocessor driven system
- Mechanical keyboard or LCD display with keyboard operation
- Automatic Width Adjust as option
- Single piece aluminium rails, proprietary design

POWER SUPPLY:

230V 50Hz 1+N+T

CURRENT:

2 Ampere

AIR SUPPLY:

NO AIR

WEIGHT:

115 Kg

DIMENSION LxWxH:

1.400x810x950 mm

COLOR:

RAL 7035

FRAME:

Aluminium profiles

All modules are ESD compliant and CE marked, each module has an independent control system. Technical specification may change without any advanced notice.



www.seica-automation.it

sales@seica-automation.com

info@seica-automation.com

+39 0362 15 72 717

Seica Automation s.r.l

Via Sardegna, 4 20841

Carate Brianza (MB) ITALY

P.iva / C.F. 11044290010