

FLEXSERIES

PART NUM: SA-FC-LC-WBOMESH

LINKING CONVEYOR – OUTFEED OVEN

Flat Belt Conveyor Outfeed - Mesh Belt Reflow Oven

Used at exit of mesh belt reflow oven.

Standard length is 1.300mm (can be customized).

Variable speed control and full sensor adjustable.

Additional Sensor at exit of reflow oven increase the interception of PCB manually placed into the reflow oven.

Custom width dimension adapt this unit to all reflow oven on the market, no SMEMA required.


Standard Linking Conveyor include:

- Speed belt adjustment
- Outfeed reflow sensor as option



Imagery for illustration purposes only. Please consult your local Seica Automation distributor for more information.

Layout Module

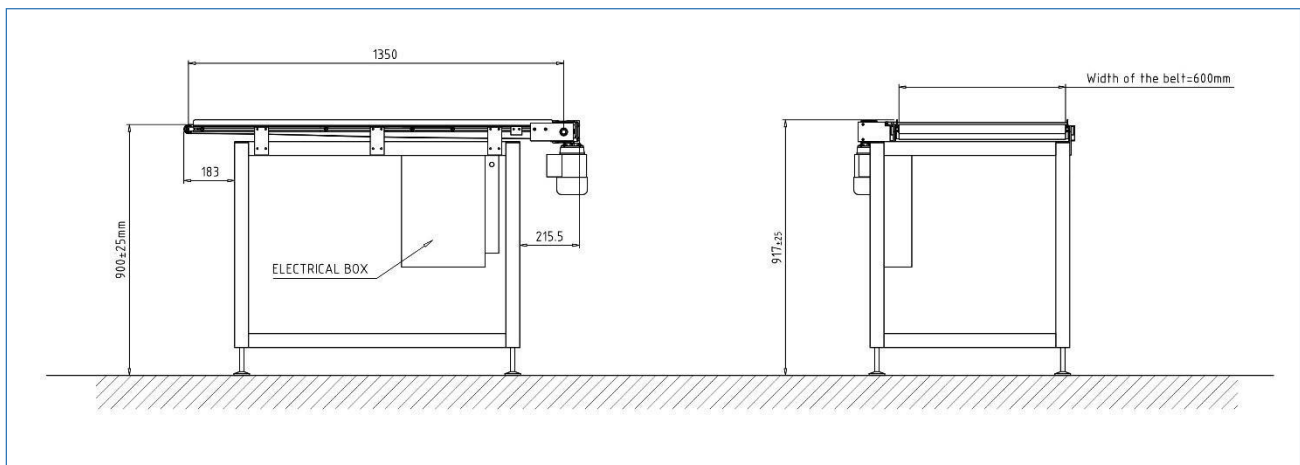

FLEX SERIES GENERAL FEATURES

TRANSPORT	
Height:	950 mm +/- 25 mm
Width:	400 mm
PCB edge space:	Min. 3 mm
Transfer direction:	Left to right
Operating side:	Front of the machine
Fixed Rail:	Front of the machine
Interface:	SMEMA standard extended SMEMA Optional Fuji, Panasonic, Sanyo, Siemens, SMPI, Special
SMEMA cable length:	3 m

PANEL DIMENSION	
Length:	Not Applicable
Width:	Not Applicable
Optional width:	Up to 600 mm on request
Thickness:	Not Applicable
PCB max weight:	2 Kg

VARIOUS:

- CE safety compliant
- PLC microprocessor driven system
- Single piece aluminium rails, proprietary design

POWER SUPPLY:

230V 50Hz 1+N+T

CURRENT:

2 Ampere

AIR SUPPLY:

0,6 Mpa

WEIGHT:

95 Kg

DIMENSION LxWxH:

1.411x655x925 mm

COLOR:

RAL 7035

FRAME:

Aluminium profiles

All modules are ESD compliant and CE marked, each module has an independent control system. Technical specification may change without any advanced notice.



www.seica-automation.it

sales@seica-automation.com

info@seica-automation.com

+39 0362 1572 717

Seica Automation s.r.l

Via Sardegna, 4 20841

Carate Brianza (MB) ITALY

P.iva / C.F. 11044290010