

FLEX SERIES

PART NUM: SA-FC-LC-WBOMESH

LINKING CONVEYOR – OUTFEED OVEN

Flat Belt Conveyor Outfeed - Mesh Belt Reflow Oven

Used at exit of mesh belt reflow oven.

Standard length is 1.300mm (can be customized).

Variable speed control and full sensor adjustable.

Additional Sensor at exit of reflow oven increase the interception of PCB manually placed into the reflow oven.

Custom width dimension adapt this unit to all reflow oven on the market, no SMEMA required.


Standard Linking Conveyor include:

- Speed belt adjustment
- Outfeed reflow sensor as option



Imagery for illustration purposes only. Please consult your local Seica Automation distributor for more information.

Layout Module

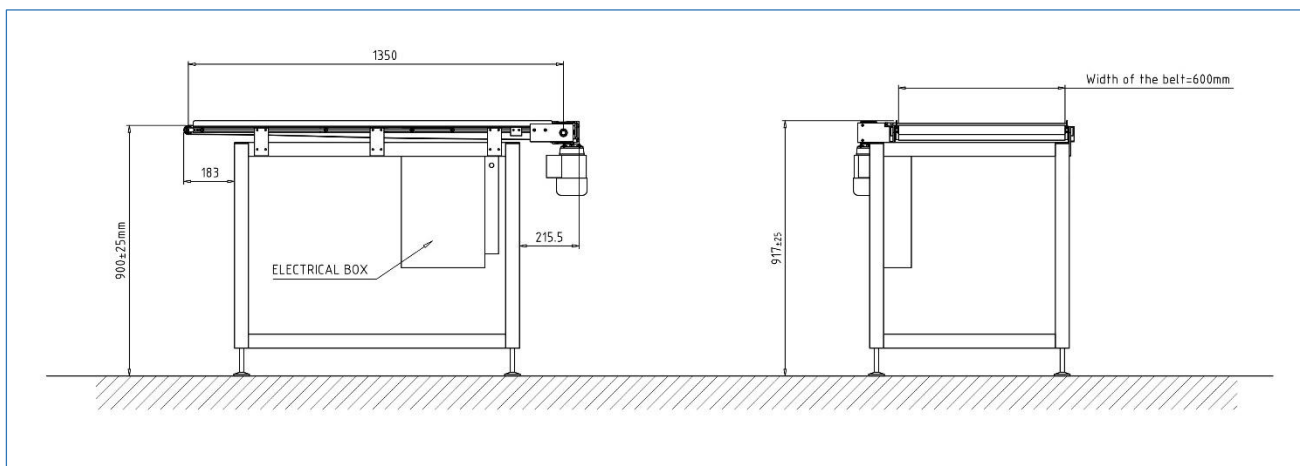

FLEX SERIES GENERAL FEATURES

| | |
|----------------------------|--|
| TRANSPORT | |
| Height: | 950 mm +/- 25 mm |
| Width: | 400 mm |
| PCB edge space: | Min. 3 mm |
| Transfer direction: | Left to right |
| Operating side: | Front of the machine |
| Fixed Rail: | Front of the machine |
| Interface: | SMEMA standard extended SMEMA Optional Fuji, Panasonic, Sanyo, Siemens, SMPI, Special |
| SMEMA cable length: | 3 m |

| | |
|------------------------|-------------------------|
| PANEL DIMENSION | |
| Length: | Not Applicable |
| Width: | Not Applicable |
| Optional width: | Up to 600 mm on request |
| Thickness: | Not Applicable |
| PCB max weight: | 2 Kg |

VARIOUS:

- CE safety compliant
- PLC microprocessor driven system
- Single piece aluminium rails, proprietary design

POWER SUPPLY: 230V 50Hz 1+N+T

CURRENT: 2 Ampere

AIR SUPPLY: 0,6 Mpa

WEIGHT: 95 Kg

DIMENSION LxWxH: 1.411x655x925 mm

COLOR: RAL 7035

FRAME: Aluminium profiles

All modules are ESD compliant and CE marked, each module has an independent control system. Technical specification may change without any advanced notice.

