

FLEX SERIES

PART NUMBER: SA-FC-LC2S-I

LINKING CONVEYOR INSPECTION

Linking Conveyor 2 Segment with Inspection (on 2nd Segment)

Used to pass PCB from different sections of the line.

The module is composed of two segment
 from 1.000mm(500+500mm)
 up to 2.000 mm (1.000+1.000mm)
 Standard 1.200mm.

Inspection mode by manual selector On/Off. PCB Stop on 2nd segment.


Standard Linking Conveyor include:

- Cover (without micro switch)
- Transport speed 200 mm/sec.

Imagery for illustration purposes only. Please consult your local Seica Automation distributor for more information.



Layout Module

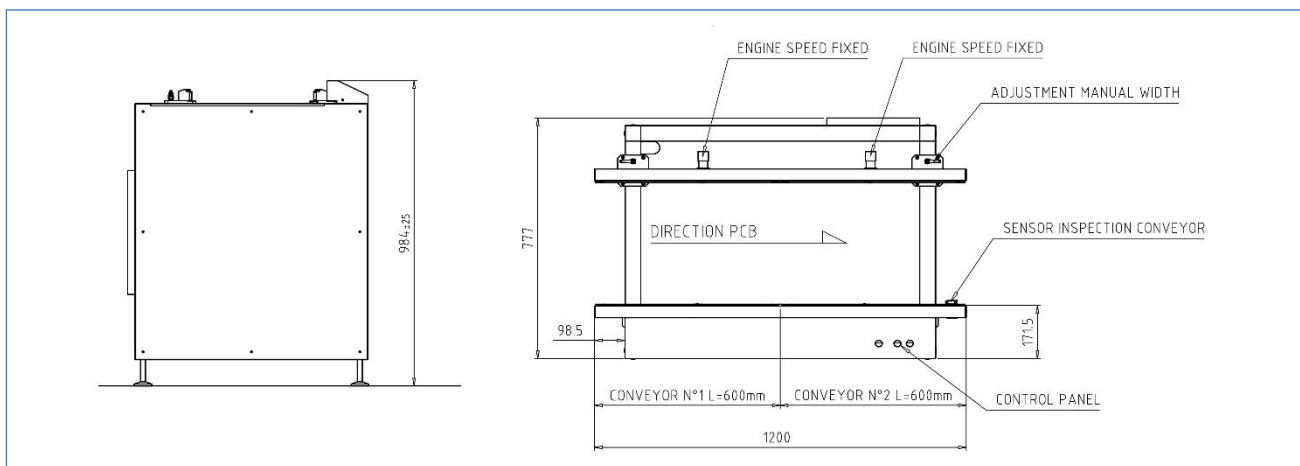

FLEX SERIES GENERAL FEATURES

TRANSPORT	
Height:	950 mm +/- 25 mm
Component clearance :	Top 50 mm (80 mm on request) Bottom 30 mm (80 mm on request)
PCB edge space:	Min. 3 mm
Transfer direction:	Left to right
Operating side:	Front of the machine
Fixed Rail:	Front of the machine
Interface:	SMEMA standard extended SMEMA Optional Fuji, Panasonic, Sanyo, Siemens, SMPI, Special
SMEMA cable length:	3 m

PANEL DIMENSION	
Length:	Min. 80 mm – Max 510 mm
Width:	Min. 85 mm – Max 390 mm
Optional width:	Up to 460 mm on request
Thickness:	From 0.8 mm to 4.0 mm
PCB max weight:	2 Kg

VARIOUS:

- CE safety compliant
- PLC microprocessor driven system
- Automatic Width Adjust as option
- Single piece aluminium rails, proprietary design

POWER SUPPLY:

230V 50Hz 1+N+T

CURRENT:

1.5 Ampere

AIR SUPPLY:

No Air Required

WEIGHT:

80 Kg

DIMENSION LxWxH:

1.200x781x1.172 mm

COLOR:

RAL 7035

FRAME:

Aluminium profiles

All modules are ESD compliant and CE marked, each module has an independent control system. Technical specification may change without any advanced notice.

