

FLEXSERIES

PART NUM: SA-FC-LCI2S-I

LINKING CONVEYOR – INFEED/OUTFEED OVEN

Linking Conveyor Inspection-2 Segment Infeed Oven Function

Used at the exit of the oven and comes with an adjustable speed conveyor, this module matches the speed of the conveyor to the speed of the reflow oven and stops PCB at the end of the conveyor to inspect it.

The module is composed of 2 segments of 600 mm (Total length = 1.200 mm).


Standard Linking Conveyor include:

- Cover (without micro switch)
- Transport speed 200 mm/sec

Imagery for illustration purposes only. Please consult your local Seica Automation distributor for more information.



Layout Module

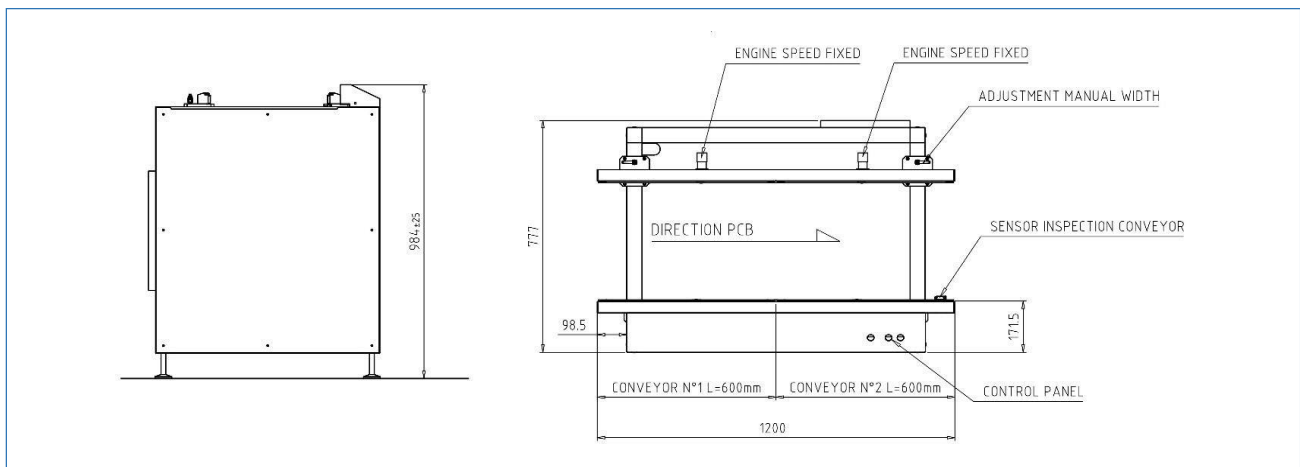

FLEX SERIES GENERAL FEATURES

TRANSPORT	
Height:	950 mm +/- 25 mm
Component clearance:	Top 50 mm (80 mm on request) Bottom 30 mm (80 mm on request)
PCB edge space:	Min. 3 mm
Transfer direction:	Left to right
Operating side:	Front of the machine
Fixed Rail:	Front of the machine
Interface:	SMEMA standard extended SMEMA Optional Fuji, Panasonic, Sanyo, Siemens, SMPI, Special
SMEMA cable length:	3 m

PANEL DIMENSION	
Length:	Min. 80 mm – Max 510 mm
Width:	Min. 85 mm – Max 390 mm
Optional width:	Up to 460 mm on request
Thickness:	From 0.8 mm to 4.0 mm
PCB max weight:	2 Kg

VARIOUS:

- CE safety compliant
- PLC microprocessor driven system
- Automatic Width Adjust as option
- Automatic control of limit reached
- Single piece aluminium rails, proprietary design

POWER SUPPLY:

230V 50Hz 1+N+T or
50 Hz 1+N+T

CURRENT:

2 Ampere

AIR SUPPLY:

0,6 Mpa

WEIGHT:

70 Kg

DIMENSION LxWxH:

600x781x1.172 mm

COLOR:

RAL 7035

FRAME:

Aluminium profiles

All modules are ESD compliant and CE marked, each module has an independent control system. Technical specification may change without any advanced notice.



www.seica-automation.it

sales@seica-automation.com
info@seica-automation.com
+39 0362 1572 717

Seica Automation s.r.l
Via Sardegna, 4 20841
Carate Brianza (MB) ITALY
P.iva / C.F. 11044290010